

Modular Preconfigured Circle

Model Number: **18-PCC**

<http://barbican.ca/product/modular-preconfigured-circle/>

Please inform Barbican of the ceiling type at the time of order.

Component Size

24D	24" centre line Diameter (2ft)
36D	36" centre line Diameter (3ft)
48D	48" centre line Diameter (4ft)
60D	60" centre line Diameter (5ft)
72D	72" centre line Diameter (6ft)
96D	96" centre line Diameter (8ft)
120D	120" centre line Diameter (10ft)
144D	144" centre line Diameter (12ft)

Size

	3"H	4"H	6"H	8"H	10"H	12"H
3"W	⊖	⊖	⊖	⊖	⊖	⊖
4"W	⊖	⊖	⊖	⊖	⊖	⊖
6"W	⊖	⊖	⊖	⊖	⊖	⊖
8"W	⊖	⊖	⊖	⊖	⊖	⊖
10"W	⊖	⊖	⊖	⊖	⊖	⊖
12"W	⊖	⊖	⊖	⊖	⊖	⊖

Exclusions:

- 24D: 10W-3H, 10W-4H, 10W-6H, 10W-8H, 10W-10H, 10W-12H, 12W-3H, 12W-4H, 12W-6H, 12W-8H, 12W-10H, 12W-12H

Material

We offer over 250 material options, and provide custom material requests. Please visit our website for a complete list of our materials.

Mounting

ACB	Aircraft Cable BLACK
ACW	Aircraft Cable WHITE
CUSTOM	Custom Length (Specify in Additional Notes)

Driver Location

SCL	Surface Ceiling Location
FCL	Flush Ceiling Location
ACL	Above Ceiling Location

Finish

STDFIN	Standard
WHT	White
BA	Brushed Aluminum
RAL	RAL
CUSTF	Custom

Source

3W/LF	3W per linear foot (50 LPW)
6W/LF	6W per linear foot (50 LPW)
9W/LF	9W per linear foot (50 LPW) - Standard
12W/LFHO	12W per linear foot (100 LPW) - High Output

Voltage

120V	120 Volts
277V	277 Volts

Temperature

3000K	3000 °K
2700K	2700 °K
3500K	3500 °K
4000K	4000 °K

Colour Rendering Index



80CRI	80 CRI
-------	--------

Dimming Drivers

	REQUIRED VOLTAGE
LED 0-10V Dimming	
DB(0-10V)	120V, 277V

Modular Spacing

PG	Purpose Gap
NG	No Gap (Premium)

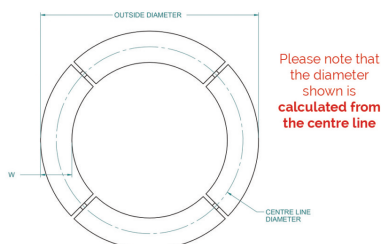

Please note that not all of the above product configurations have been built. Products and lead times may vary. Specifications subject to change without notice. Please visit barbican.ca for the most current specifications and to build part numbers.



1-800-663-5781

barbican.ca