


# BISCOTTI SCONCE

WALL SCONCE

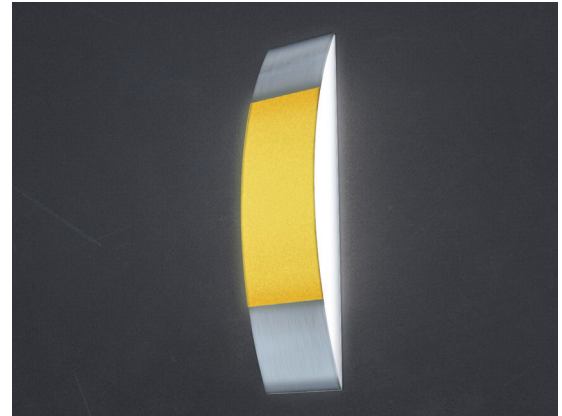

The Biscotti Sconce can be oriented vertically or horizontally and features a diffused opal lens for lateral light distribution and a luminous front element with one of our standard laminated fabric color. Or utilize our printed patterns, or natural wood or stone looks. It is an ADA Compliant Light Fixture\* with a size of 28" in length/height, 6" wide and 3-7/8" in depth. End caps are brushed aluminum by default.

Manufactured with Barbican's laminated shade material, ensures that the fixture is durable and less prone to damage during installation and day to day interactions than traditional fabric shades.

\*ADA Compliant Fixture. The American Disabilities Act (ADA) has set restrictions for clearance that will enable safe use of the space for everyone. Our ADA-compliant fixtures have thin profiles, under 4" in depth, making them ideal for various room applications.

## RELATED FIXTURES



Antica Sconce



Peace Sconce



Tower



Tubular

## AVAILABLE FINISH OPTIONS

### Laminated Fabric




### Printed Pattern



### Natural Wood



### Natural Stone



### Artisan Collection



### Metal



# BISCOTTI SCONCE

WALL SCONCE



## SPECIFICATION (1/2)

Fixture	Width	Height	Shade Finish Category*	Shade Finish Selection*	Diffuser
16-7801	6	28			HTO
16-7801 Biscotti Sconce	6W 6"	28H 28"	<b>LF</b> Laminated Fabric * <b>FF</b> Fabric Free <b>PS</b> Printed Pattern <b>PW</b> Natural Wood <b>PSF</b> Natural Stone <b>PSASP</b> Sarah Phelps ** <b>PSAKC</b> Kaleidoscope ** <b>PSAAP</b> Aleta Pippin ** <b>CP</b> Custom Printing <i>Consult factory</i>	Finish Name <i>* Please visit <a href="http://barbican.ca/resources">barbican.ca/resources</a> to view finishes or choose from the laminated materials lightbox in the drum product builder on our website.</i>  <i>** If choosing FF for Fabric Free for Shades Finish Category, no selection is required here.</i>	HTO Opal

*\* See following pages for examples/ names of all Laminated Fabric finishes*  
*\*\* Part of Barbican's [Artisan Collection](#)*

Mounting	Driver Location	Voltage	Back Plate Finish	Color Temperature
SFM		UNV	WBP	
SFM Surface Mount	<b>INDL</b> Intergral Driver* <b>CUSDL</b> Custom Driver <i>* Tunable white and RGB/RGBW sources may require remote driver. Consult factory for details</i>	<b>UNV</b> 120/277 Volts <i>Consult factory for other voltages</i>	<b>WBP</b> White	White Sources <b>2700K</b> 2700K <b>3000K</b> 3000K <b>3500K</b> 3500K <b>4000K</b> 4000K <b>3000FS</b> Full Spectrum 3000K <b>3500FS</b> Full Spectrum 3500K <b>2765K</b> Tunable White* 2700K - 6500K <b>CUSK</b> Custom CT*

*RGB / RGBW Sources*  
**RGBW** RGBW\*  
*\*Consult factory for CT options in this column*

Color Rendering	Delivered Output	Dimming Driver
90CRI		
<b>90</b> 90+ CRI <i>Full Spectrum:                      Min 95+ CRI                      Min R1-R15 90+                      Rf 95                      Rg 105</i>	<b>20 WO</b> 20W <b>36 WO</b> 36W <b>CUSWO</b> Custom Output* <i>Maximum Output varies by diameter                      Delivered output varies by shade finish choice.                      Consult factory for details on specific options.</i>	<i>White Sources Static</i> <b>S010V10</b> Standard 0-10V, 10% <b>S010V01</b> Standard 0-10V, 1%, (dim to off) <b>EDALI01</b> DALI control, 0.1% <b>LECO01</b> Lutron Ecosystem, 1% SOFTB, (Soft-on, Fade-to-Black)  <i>White Sources Tunable</i> <b>TW010V</b> Tunable White 2-Channel 0-10V <b>TWDALI</b> Tunable White DALI control <b>LECOTW</b> Lutron Ecosystem, 1%, Tunable White - T series  <i>RGB / RGBW Sources</i> <b>EDMX01</b> DMX, 0.1%  <b>CUSDD</b> Other Driver Options <i>Consult factory for availability of other driver options (including POE and Camera Safe)</i>

# BISCOTTI SCONCE

WALL SCONCE



## WRITTEN SPECIFICATIONS

### LED System

- LED Circuitry is applied to minimum 0.0625" thick aluminum modules for excellent heat management. Modules are removeable for maintenance and are 90% recyclable.
- LEDs are 90+CRI, 3 SDCM.
- Fixture performance at 3000K, 90CRI, 3630lms, 36W, 101 LPW delivered with Fabric Free Shade. Fabric color or print will have impact on delivered lumens, consult factory for details..

### Construction

- Side Diffuser: Wet Laminated PETG (polyethylene terephthalate glycol-modified); which is a variant of PET used in water bottles everywhere. Designed to be used in environments where high levels of disinfectant products are used. It is also has a much higher impact resistance than Acrylic.
  - Barbican uses a proprietary diffusion formula PETG which in conjunction with the LED system provides excellent efficiencies of up to 95 lumens per watt at 3000K 90+ CRI.
- Metal construction to be aluminum minimum 0.0625" thickness. Fasteners are to be stainless steel.
- Cable grippers are nickel plated solid brass and stainless steel. Cables are 1/16" stainless steel.
- Canopies and driver housings are minimum 0.0625" aluminum.
- Barbican's Drum fixtures comes standard with the shade and light engine fully enclosed to protect from ingress of dirt, dust and other site conditions.

### Mounting

- Power cables are low voltage from the canopy drivers.
- Drivers: All drivers are mounted in the canopy. Standard drivers include 0-10V 10% dimming 120/277V with Power Factor of >.9. Barbican works with most Control and Driver manufacturers including POE and can easily modify the driver housings for special control gear. Fixtures over 96W may require more than one driver per fixture.
- Emergency fixtures are supplied with leads and KO for UL924 relays (by others). Battery back up will usually only drive one or two of the cores in larger fixtures to maintain the 90 minute requirement. Maximum distance driver to fixture 15 feet.
- Labels: ETL US and Canada, CE Europe and Middle East (Dry, Damp indoor use only)
- Finish: Polyester Powder Coated standard, Hand Brushed Aluminum
- Lumen Maintenance: Reported L90 > 10,000hrs, Calculated > 60,000hrs (TM-21)
- Warranty: 5 years limited at 25 Celsius. Contact Barbican for additional information.

## LABELS



ETL/CE  
Listed



Dry/Damp  
Rated



5  
Years  
Warranty



Power Over  
Ethernet



Washable



Tunable  
White



RGBW  
Color Tuning



Full  
Spectrum

# BISCOTTI SCONCE

WALL SCONCE



## LAMINATED FABRIC Colour Samples





# BISCOTTI SCONCE

WALL SCONCE



## APPLICATIONS



# BISCOTTI SCONCE

WALL SCONCE

## SPECIFICATION DETAILS

### Line Drawing

