




Barbican Bend


Metro Modular Bend offers a gentle curve of a 12,24,36, or 48 " radius, with widths of 3,4,6,8,10, or 12 " & heights of 3,4,6,8,10, or 12 ".




Sealed




Health Care



Acoustic Options



LED



Customizable

Please find an overall listing of all product options. Barbican specializes in producing products on a per request basis. Please feel free to use our online builder to determine conditional options, or confer with your lighting rep, or reach out to sales@barbican.ca for more information.




Component Size		Size		Mounting		End Lens		Driver Location		Finish (Canopies, Stems)	
12R	12" radius - 9.188" length	3W	3H	ACW	Aircraft Cable WHITE Power Cord	MBL	Match Bottom Lens	SCL	Surface Ceiling Location	WHT	White
		4W	4H							BLK	Black
		6W	6H							BA	Brushed Aluminum
24R	24" radius - 18.375" length	8W	8H	ACB	Aircraft Cable BLACK Power Cord	MFM	Match Front Material	FCL	Flush Ceiling Location	RAL	RAL (North American)
		10W	10H								
36R	36" radius - 27.5" length	12W	12H					ACL	Above Ceiling Location		
48R	48" radius - 36.75" length										

Source		Voltage		Temperature		Colour Rendering Index		Dimming Drivers		Assembly Type	
190LM/LF	190LM/LF (2W/LF)	120V	120 Volts	2700K	2700 °K	90CRI	90 CRI	DB(0-10V)	DB(0-10V)	SP	Single Pendant
380LM/LF	380LM/LF (4W/LF)	277V	277 Volts	3000K	3000 °K					PG	Purpose Gap
760LM/LF	760LM/LF (8W/LF)			3500K	3500 °K					NG	No Gap (Premium)
				4000K	4000 °K						

Materials

Choose from our large materials collection using our online product builder.

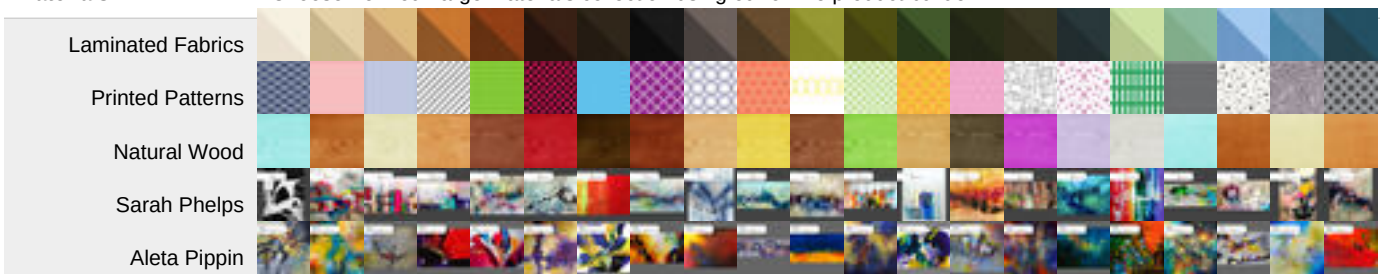

Please visit our website to view our full material galleries, where you will find natural stone, natural wood, metallized finish, printed patterns and our Artisan Collection.

